



## Maßzeichnungen PRINETO Industrieflächenheizung

### PE-X Flächenheizrohr, hochflexibel




Abmessung	Art.-Nr.	d mm	s mm	AD Bund	ID Bund	Breite Bund	l/m	kg/m
20 x 2,0 - 240 m	878 311 161	20	2,0	860	450	246	0,2	0,125

### ÖKO-FLEX Flächenheizrohr PE-HDS, green-linked




Abmessung	Art.-Nr.	d mm	s mm	AD Bund	ID Bund	Breite Bund	l/m	kg/m
20 x 2,0 - 240 m	878 311 371	20	2,0	860	450	246	0,2	0,125
20 x 2,0 - 600 m	878 311 372	20	2,0	830	520	520	0,2	0,125
25 x 2,3 - 240 m	878 311 381	25	2,3	840	480	560	0,33	0,177

### Konsole für Industrieverteiler

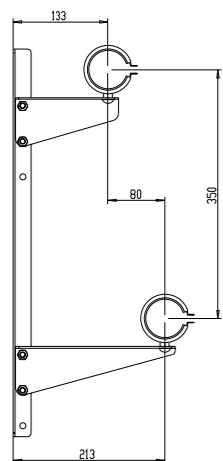


Abmessung	Art.-Nr.	h mm	t <sub>1</sub> mm	t <sub>2</sub> mm
2"	878 386 202	350	133	213

### Industrierverteiler 2" mit Flowmetern

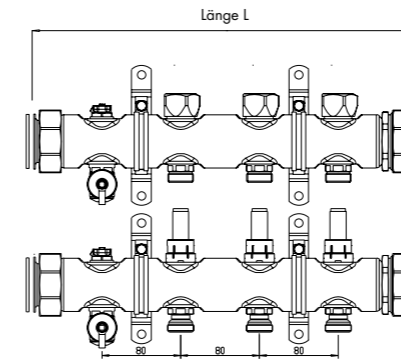


Abmessung	Art.-Nr.	l mm
2" 2-fach	878 386 180	290
2" 3-fach	878 386 181	370
2" 4-fach	878 386 182	450
2" 5-fach	878 386 183	530
2" 6-fach	878 386 184	610
2" 7-fach	878 386 185	690
2" 8-fach	878 386 186	770
2" 9-fach	878 386 187	850
2" 10-fach	878 386 188	930
2" 11-fach	878 386 189	1.010
2" 12-fach	878 386 190	1.090
2" 13-fach	878 386 191	1.170
2" 14-fach	878 386 192	1.250
2" 15-fach	878 386 193	1.330
2" 16-fach	878 386 194	1.410
2" 17-fach	878 386 195	1.490
2" 18-fach	878 386 196	1.570
2" 19-fach	878 386 197	1.650
2" 20-fach	878 386 198	1.730

### Industrierverteiler 2" mit Regulierventilen

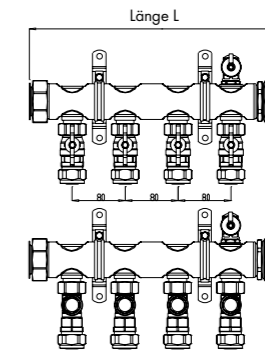


Abmessung	Art.-Nr.	l mm
2" 2-fach	878 386 160	203
2" 3-fach	878 386 161	283
2" 4-fach	878 386 162	363
2" 5-fach	878 386 163	443
2" 6-fach	878 386 164	523
2" 7-fach	878 386 165	603
2" 8-fach	878 386 166	683
2" 9-fach	878 386 167	763
2" 10-fach	878 386 168	843
2" 11-fach	878 386 169	923
2" 12-fach	878 386 170	1.003
2" 13-fach	878 386 171	1.083
2" 14-fach	878 386 172	1.163
2" 15-fach	878 386 173	1.243
2" 16-fach	878 386 174	1.323
2" 17-fach	878 386 175	1.403
2" 18-fach	878 386 176	1.483
2" 19-fach	878 386 177	1.563
2" 20-fach	878 386 178	1.643

### Übergang mit Verschraubung Eurokonus




Abmessung	Art.-Nr.	z mm
20 x 2,0 - V Euro	878 343 720	20

### Kupplung




Abmessung	Art.-Nr.	z mm	l mm
20 x 2,0	878 340 779	13,0	47,0
25 x 2,3	878 340 880	13,0	47,0

### Reduzierkupplung




Abmessung	Art.-Nr.	z mm	l mm
20 x 2,0 - 17	878 340 751	12,5	43,5
25 x 2,3 - 17	878 340 850	13,5	48,5
25 x 2,3 - 20 x 2,0	878 340 870	14,0	52,0
32 - 20 x 2,0	878 340 470	15,0	58,0
32 - 25 x 2,3	878 340 480	15,5	62,5

### Winkel 90°




Abmessung	Art.-Nr.	z mm
25x2,3 - 25x2,3	878 374 880	25,5

### Übergang mit Außengewinde




Abmessung	Art.-Nr.	z mm	l mm
20 x 2,0 - R 1/2"	878 341 750	32	49,5
20 x 2,0 - R 3/4"	878 341 760	34	51,5
25 x 2,3 - R 3/4"	878 341 860	35	56,0

### Rohrführungsbogen



Abmessung	Art.-Nr.	l mm
16	878 681 100	85
20	878 681 200	110

### Winkelspange



Abmessung	Art.-Nr.	l mm
bis 21	878 681 250	140
bis 25	878 681 350	170